

# SUPER NYLSUN

The featherweight  
Thanks to its easily interchan-  
geable lenses and the peren-  
nially-fashionably frame design,  
the featherweight (23g) Super  
Nylsun can cater to the needs  
of very many users.



SNPI



SNPG



SNPT




SNPV



SNPF



SNPJ

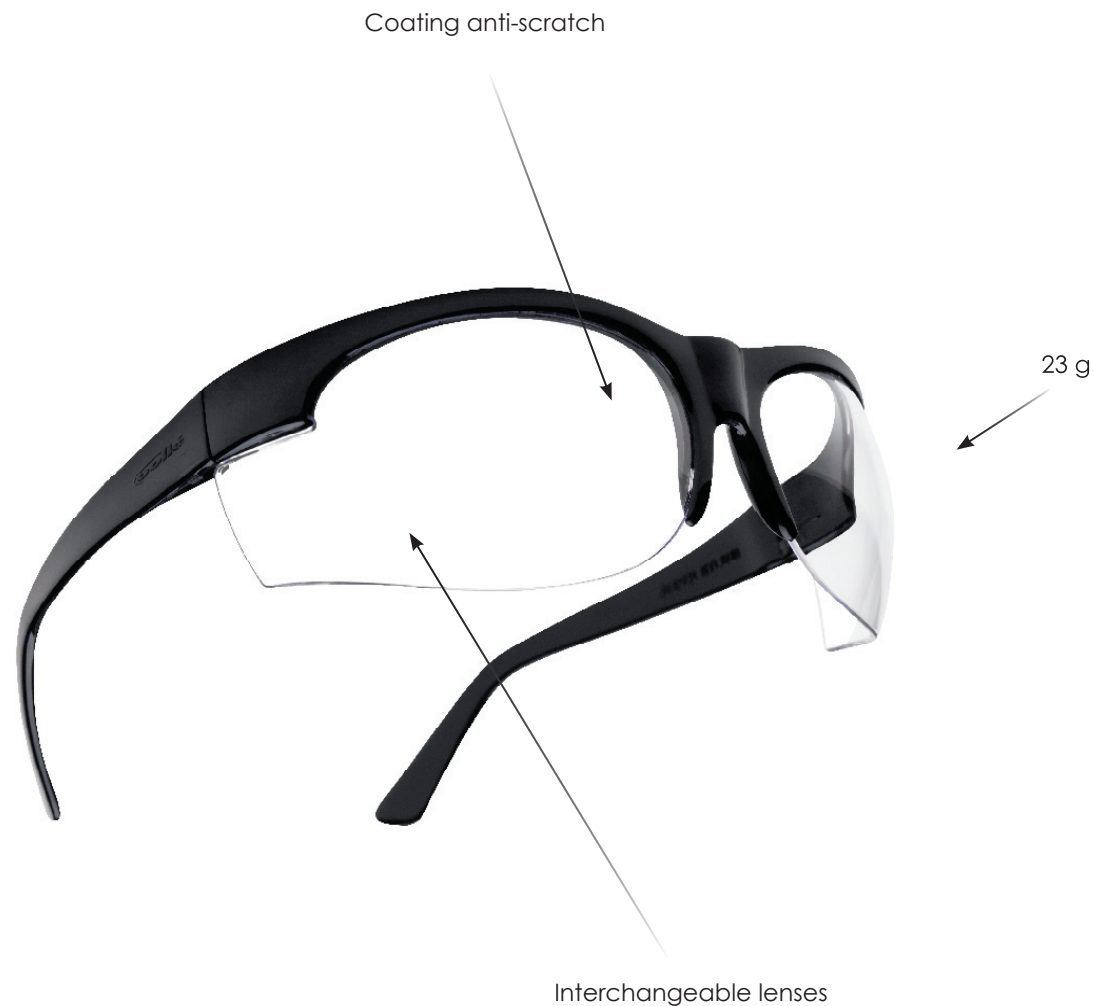

**Europe Bollé Safety**  
95 Rue Louis Guérin  
69100 Villeurbanne - France  
tel: 00 33 (0) 4 78 85 23 64  
fax: 00 33 (0) 4 78 85 28 56  
contact@bolle-safety.com

**U.K. Bollé Safety**  
Unit C83 - Barwell Business Park  
Leatherhead Road - Chessington  
Surrey - KT9 2NY  
tel. 00 44 (0)208 391 4700  
fax 00 44 (0)208 391 4733  
e-mail : sales@bolle-safety.co.uk

STANDARDS MARKINGS :

Products ref.	LENSES													FRAMES												
	Risks relating to radiations		Bollé Protection logo	Optical quality			Mechanical Risks				Electrical Risks	Thermal Risks	Coatings (Optional marking K: anti-scratch N: anti-fog)		Bollé Protection logo	Standards	Chemical Risks			Electrical Risks	Mechanical Risks			Thermal Risks	CE logo	
	EN 170 - UV	EN 172 - Solaires (100% UV)		Permanent wear	Intermittent wear	Short period	Low energy impact 45 m/s	Medium energy impact 120 m/s	High energy impact 190 m/s	Extremes of temperature impact	Electric arc short circuiting	Molten metals and hot solids	anti-scratch	anti-fog			Liquid drops	Large dust particles > 5 microns	Gas and fine dust particles < 5 microns	Electric arc short circuiting	Low energy impact 45 m/s	Medium energy impact 120 m/s	High energy impact 190 m/s	Extremes of temperature impact		Molten metals and hot solids
SNPI et OCSNPI	2-1,2			1		F	N/A	N/A		N/A	N/A					EN 166	N/A	N/A	N/A	N/A	F	N/A	N/A		N/A	
SNPG		5-4,1		1		F	N/A	N/A		N/A	N/A					EN 166	N/A	N/A	N/A	N/A	F	N/A	N/A		N/A	
SNPT et OCSNPT	2-3			1		F	N/A	N/A		N/A	N/A					EN 166	N/A	N/A	N/A	N/A	F	N/A	N/A		N/A	
SNPV et OCSNPV		5,2		1		F	N/A	N/A		N/A	N/A					EN 166	N/A	N/A	N/A	N/A	F	N/A	N/A		N/A	
SNPF et OCSNPF		5-3,1		1		F	N/A	N/A		N/A	N/A					EN 166	N/A	N/A	N/A	N/A	F	N/A	N/A		N/A	
SNPJ et OCSNPJ	2-1,2			1		F	N/A	N/A		N/A	N/A					EN 166	N/A	N/A	N/A	N/A	F	N/A	N/A		N/A	

N/A: Non applicable

SNPI



SNPG

SNPT



SNPV

SNPF



SNPJ

CHARACTERISTICS :

Lenses	PC - 2,0 mm - Curve 10
Frame	Nylon
Temples	Nylon
Strap	Non applicable
Foam	Non applicable
Spare lenses	OCSNPI / OCSNPT / OCSNPV OCSNPF / OCSNPJ

PACKAGING AND EAN 13 CODE :

	SNPI/ OCSNPI	SNPG	SNPT/ OCSNPT	SNPV/ OCSNPV	SNPF/ OCSNPF	SNPJ/ OCSNPJ
→ individual plastic bag	3660740002008/ 3660740001643	3660740001995	3660740002022/ 3660740001667	3660740002039/ 3660740001674	3660740001988/ 3660740001636	3660740002015/ 3660740001650
→ 10 safety spectacles or 100 spare lenses per box	3660740102005/ 3660740101640	3660740101992	3660740102029/ 3660740101664	3660740102036/ 3660740101671	3660740101985/ 3660740101633	3660740102012/ 3660740101657
→ 300 safety spectacles or 1200 spare lenses per outer pack	3660740202002/ 3660740201647	3660740201999	3660740202026/ 3660740201661	3660740202033/ 3660740201678	3660740201982/ 3660740201630	3660740202019/ 3660740201654

Notified laboratories for certification :

